

DISMANTLING LIFT

RBT

Tilting lift for car parts disassembly

3 tons
MAX LOAD

36" / 32"
TILTING

Well-being
CORRECT POSTURE AND ERGONOMICS

Safe
HIGH SAFETY STANDARDS

- Safe, stable and strong
- Fast movements
- Specially designed for the dismantling process
- Ergonomic
- High safety standards
- Easy to use
- Easy maintenance

VIDEO



Non-slip platform

Compact base

Ergonomic








Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy
+39 0522 48.10.47
commerciale@iris-mec.it
www.iris-mec.com

RBT



Non-slip platform

RBT BF

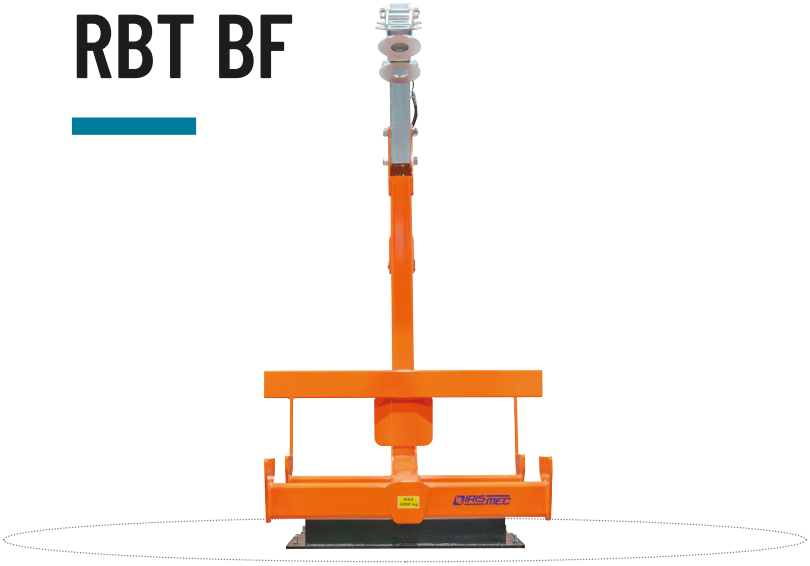


More space available


Compact base

OPTIONAL

- GR-R: Grill - 5 basins 100 x 150 x h 13 cm
- BND: Tools support arm
- BSM: Engine disassembly bench









	RBT32 (140080700) - **RBT32 BF** (140080700BF)		
Load capacity	max	3000	
Tilting			
Tilting time		↑36" - 32"↓	sec
Tilting angle		90°	
Hydraulic circuit pressure	max	190	
Power supply	max	4,5	kW
Voltage	max	Three-phase - 400 V - 50 Hz	
Rated current		11	A
'A' Weighted sound pressure level (LPA)		70	dB

Iris-Mec srl - Via Grande 25, 42028 Poviglio (RE) - Italy +39 0522 48.10.47 commerciale@iris-mec.it www.iris-mec.com

05/2024